

SURFACE PREPARATION INSTRUCTIONS

NEW CONCRETE SURFACES

- **100 Series Flooring (Thin rolled coatings):** light steel troweled finish (no burnished or hard troweled). Use dissipating curing agent such as E-Cure, if possible.
- **300/400 Series Flooring (gauged or trowelled):** Broom finish. This will allow urethane cement to be installed directly over broom finish, without further surface prep.

GENERAL REQUIREMENTS

All dirt, foreign contaminants, oil and laitance must be removed to assure a trouble-free bond to the substrate. After surface preparation and before application, repair all holes, cracks, and grind down any projections. Surface should have a minimum tensile strength of at least 300 psi @ ASTM D-4541. Surface profile should be CSP 3-5 per International Concrete Repair Institute guidelines.

TYPES OF SURFACE PREPARATION

1. SHOTBLASTING / BLASTTRACKING (bare concrete)

Shotblasting is preferred method of bare concrete surface preparation: Shotblasting will remove all laitance and provide a suitable profile for adhesion. Depending on the substrate, one of two types of steel shot should be used:

- **100/200 series (THIN ROLLED ON COATINGS):** Fine brush blast with #280 size shot.
- **300/400 series (TOPPING):** Regular blast with #330/380 size shot.

2. DIAMABRUSH

If you own or can rent a swing machine (a/k/a floor buffer or maintainer) , and the area has a thin coating or glue/mastic, you may also use the Diamabrush surface prep system.. Diamabrush has two types of 25 grit diamond disc tooling for floor prep. These can prepare the surface of bare concrete, scratch up existing thick well-bonded coatings, or combination of glue removal, thin paint removal and concrete prep..

1. REMOVAL TOOL-

removing thin paint and glue/mastic.



- #### **2. PREP TOOL (or prep+)-** abrades/profiles bare concrete or well bonded existing coatings..



Diamabrush discs can be purchased at Grainger.com or PumaCrete, or rented at Home Depot rental centers (along with floor maintainers). Dust skirts for dust control are not available at Home Depot.

Note: this system emits considerable dust, unless a proper dust skirt is attached to the floor buffer, along with a vacuum, to capture the dust.. PumaCrete includes a 17” dust skirt with all Diamabrush sales.

The diamond blades/brushes last approximately 5,000-20,000 sf depending on the type of removal/prep and skill of operator.

3. SCARIFICATION (SCARIFIER): *(remove thick coatings/toppings)*

A third type of surface prep is useful for removal of thick, peeling or unbonded coatings/toppings.

Scarifiers are available in gas engine or 3 phase electric versions. SC-10 by SASE Co. is an industry standard and requires an investment of approximately \$4,000 to \$6,000, depending on age and condition.

KEY-IN's for EDGES/TERMINATIONS *(for URETHANE CEMENT FLOORING)*

If there is not already a raised floor at edges- To prevent lifting and delaminations, keyways (minimum 1/4" wide x 3/8" deep) must be cut at all terminations including doorways, drains and anywhere that floor does not abut a wall or vertical surface.


Refer to Puma-Crete Architectural Details for diagrams of key-ins to drains and perimeter edges.

JOINT TREATMENT

Moving joints should be "honored". This requires a sawcut over the existing joint in the concrete, tape the edges and fill with a suitable joint filler such Sikaflex 2c (NS-non sag).

Refer to Puma-Crete Architectural Details for diagrams for joint treatment.

STANDARD JOINT

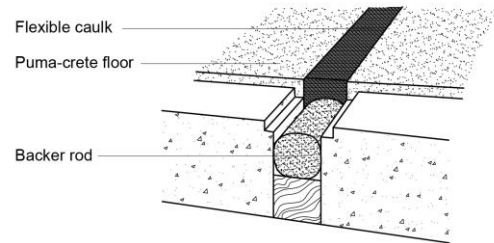

TYPICAL TOOLS/SUPPLIES

1. **Extension Cords** (12 gauge recommended)
2. **Vacuum** with quality filter/filtration. *Dewalt DV010 dust extractor (approx. \$400) has dual hepa filters, and handles diamabrush grinding as well as 4.5" angle grinders and worm gear saws.*
3. **Diamabrush discs-** REMOVAL TOOL or PREP TOOL
 - a. 17" dust skirt for 17" floor buffer.
 - b. Floor buffer (swing machine). High speed is preferred, such as the HAWK 300 rpm F0003-17XHD
4. **Floor Saw:** Cutting Perimeter Edges (for Cement Urethane mortars), or cutting joints. Worm Gear or Hypoid Saw will make up to 1-inch deep cuts with .125 or .25 inch diamond segmented cutting blades. Dust shroud adapters are available for these.
5. **Angle Grinders (with dust shrouds) 4.5" or 7"** May be used for edge prep, or prep for small areas

NOTICE TO BUYER: DISCLAIMER OF WARRANTIES AND LIMITATIONS ON OUR LIABILITY

*We warrant that our products are manufactured to strict quality assurance specifications and that the information supplied by us is accurate to the best of our knowledge. Such information supplied about our products is not a representation or a warranty. It is supplied on the condition that you shall make your own tests to determine the suitability of our product for your particular purpose. Any use or application other than recommended herein is the sole responsibility of the user. Listed physical properties are typical and should not be construed as specifications. **NO WARRANTY IS MADE, EXPRESSED OR IMPLIED, REGARDING SUCH OTHER INFORMATION, THE DATA ON WHICH IT IS BASED, OR THE RESULTS YOU WILL OBTAIN FROM ITS USE. NO WARRANTY IS MADE, EXPRESSED OR IMPLIED, THAT OUR PRODUCT SHALL BE MERCHANTABLE OR THAT OUR PRODUCT SHALL BE FIT FOR ANY PARTICULAR PURPOSE. NO WARRANTY IS MADE THAT THE USE OF SUCH INFORMATION OR OUR PRODUCT WILL NOT INFRINGE UPON ANY PATENT.** We shall have no liability for incidental or consequential damages, direct or indirect. Our liability is limited to the net selling price of our product or the replacement of our product, at our option. Acceptance of delivery of our product means that you have accepted the terms of this warranty whether or not purchase orders or other documents state terms that vary from this warranty. No representative is authorized to make any representation or warranty or assume any other liability on our behalf with any sale of our products. Our products contain chemicals that may **CAUSE SERIOUS PHYSICAL INJURY. BEFORE USING, READ THE SAFETY DATA SHEET AND FOLLOW ALL PRECAUTIONS TO PREVENT BODILY HARM.***